



**Water Department**  
**310 Mill Avenue SW**  
**New Philadelphia OH 44663**  
**PWS City of New Philadelphia**  
**PWSID OH7900812**

The main supply lines of the New Philadelphia Municipal Water Distribution (City) system are made of Ductile Iron (DI), galvanized steel, sand cast steel, and Polyvinyl Chloride (PVC or generally referred to as plastic). The 2 inch supply lines are either galvanized steel or plastic with no lead service lines on the city side.

The larger mains (4 inch up to 14 inch) where service taps exist, typically were installed using a short piece of lead pipe (approximately 18 inches length) to connect the city corp valve and the city service line. The service line continues to the curb stop valve located near the street edge or curb strip.

The private side of the service line begins at this curb stop valve and continues to a building or structure on the private property. Private service lines that have been exposed during excavation have not been recorded as containing any lead materials.

The included map with this summary, show service line areas that may contain lead materials on the city (public) side, service line areas that contain no lead materials on the public and private side, and service line areas that are unknown materials used on the private side.

The areas marked as lead may contain both lead and copper services. Some of the services in these areas have been renewed from the main line to the curb strip. The renewed services use copper line and brass compression fittings or threaded brass connections.


The building and structures plumbing have not been investigated. Only the public and private service lines have been investigated.

The city's future plans are to update the map where individual services are marked as lead. City records will be reviewed to mark services that are known to be renewed with copper. The city will also research the most efficient way to gain information about buildings and structures that should be included in the plumbing map.

Sincerely,

Derek Leyda, Superintendent



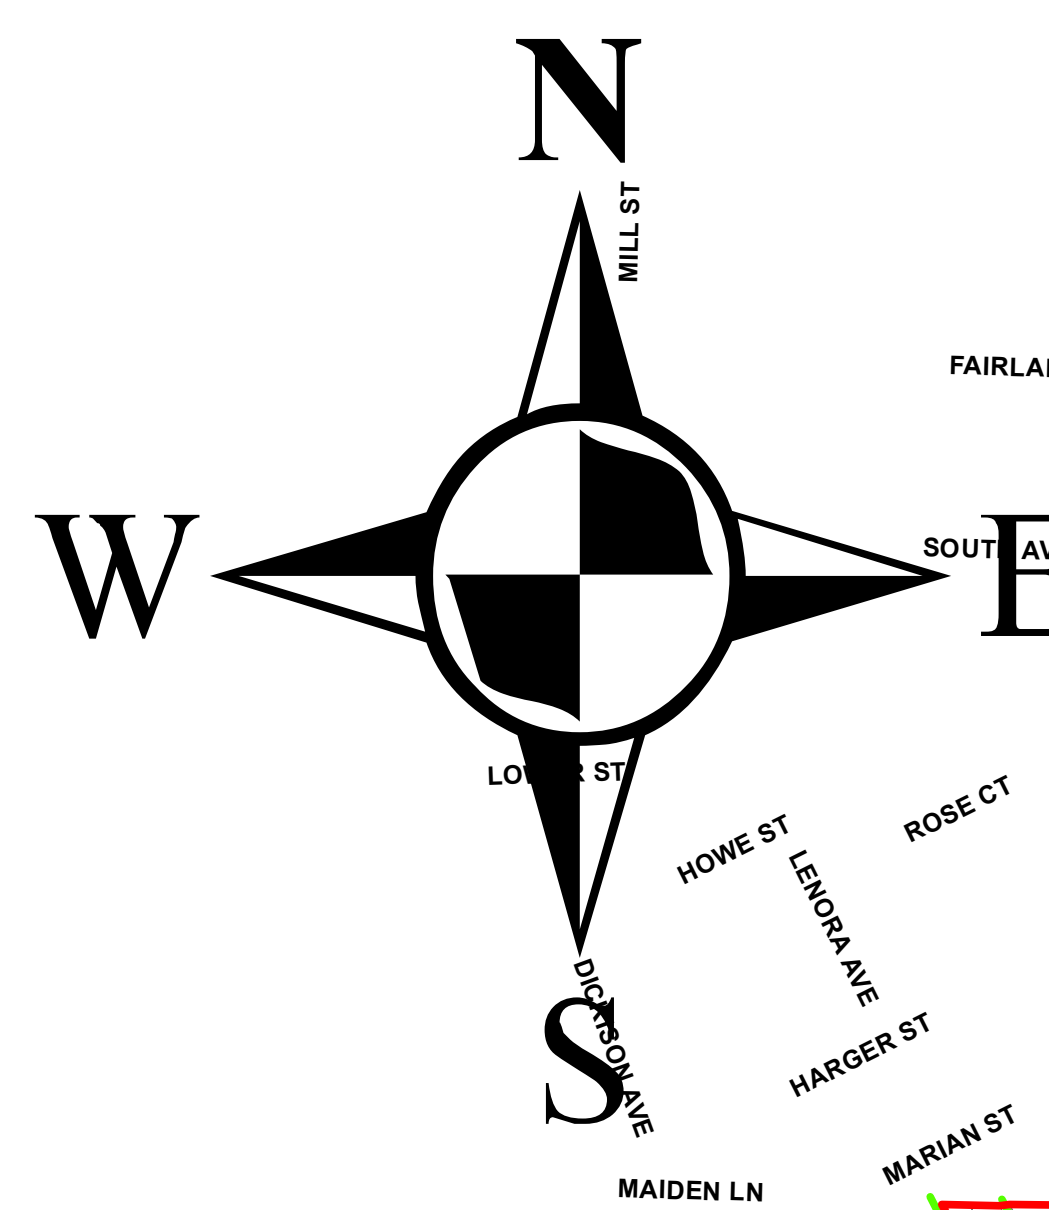

- ### Legend
- CORPORATION LINE
  - UNKNOWN RESIDENT
  - NO LEADED RESIDENT
  - NO LEADED LINE
  - LEADED LINE
  - PRIVATE LINE



City of  
New Philadelphia.  
Ohio  
as of 2/15/2017

1 inch = 600 feet

