


Spangler Rd.

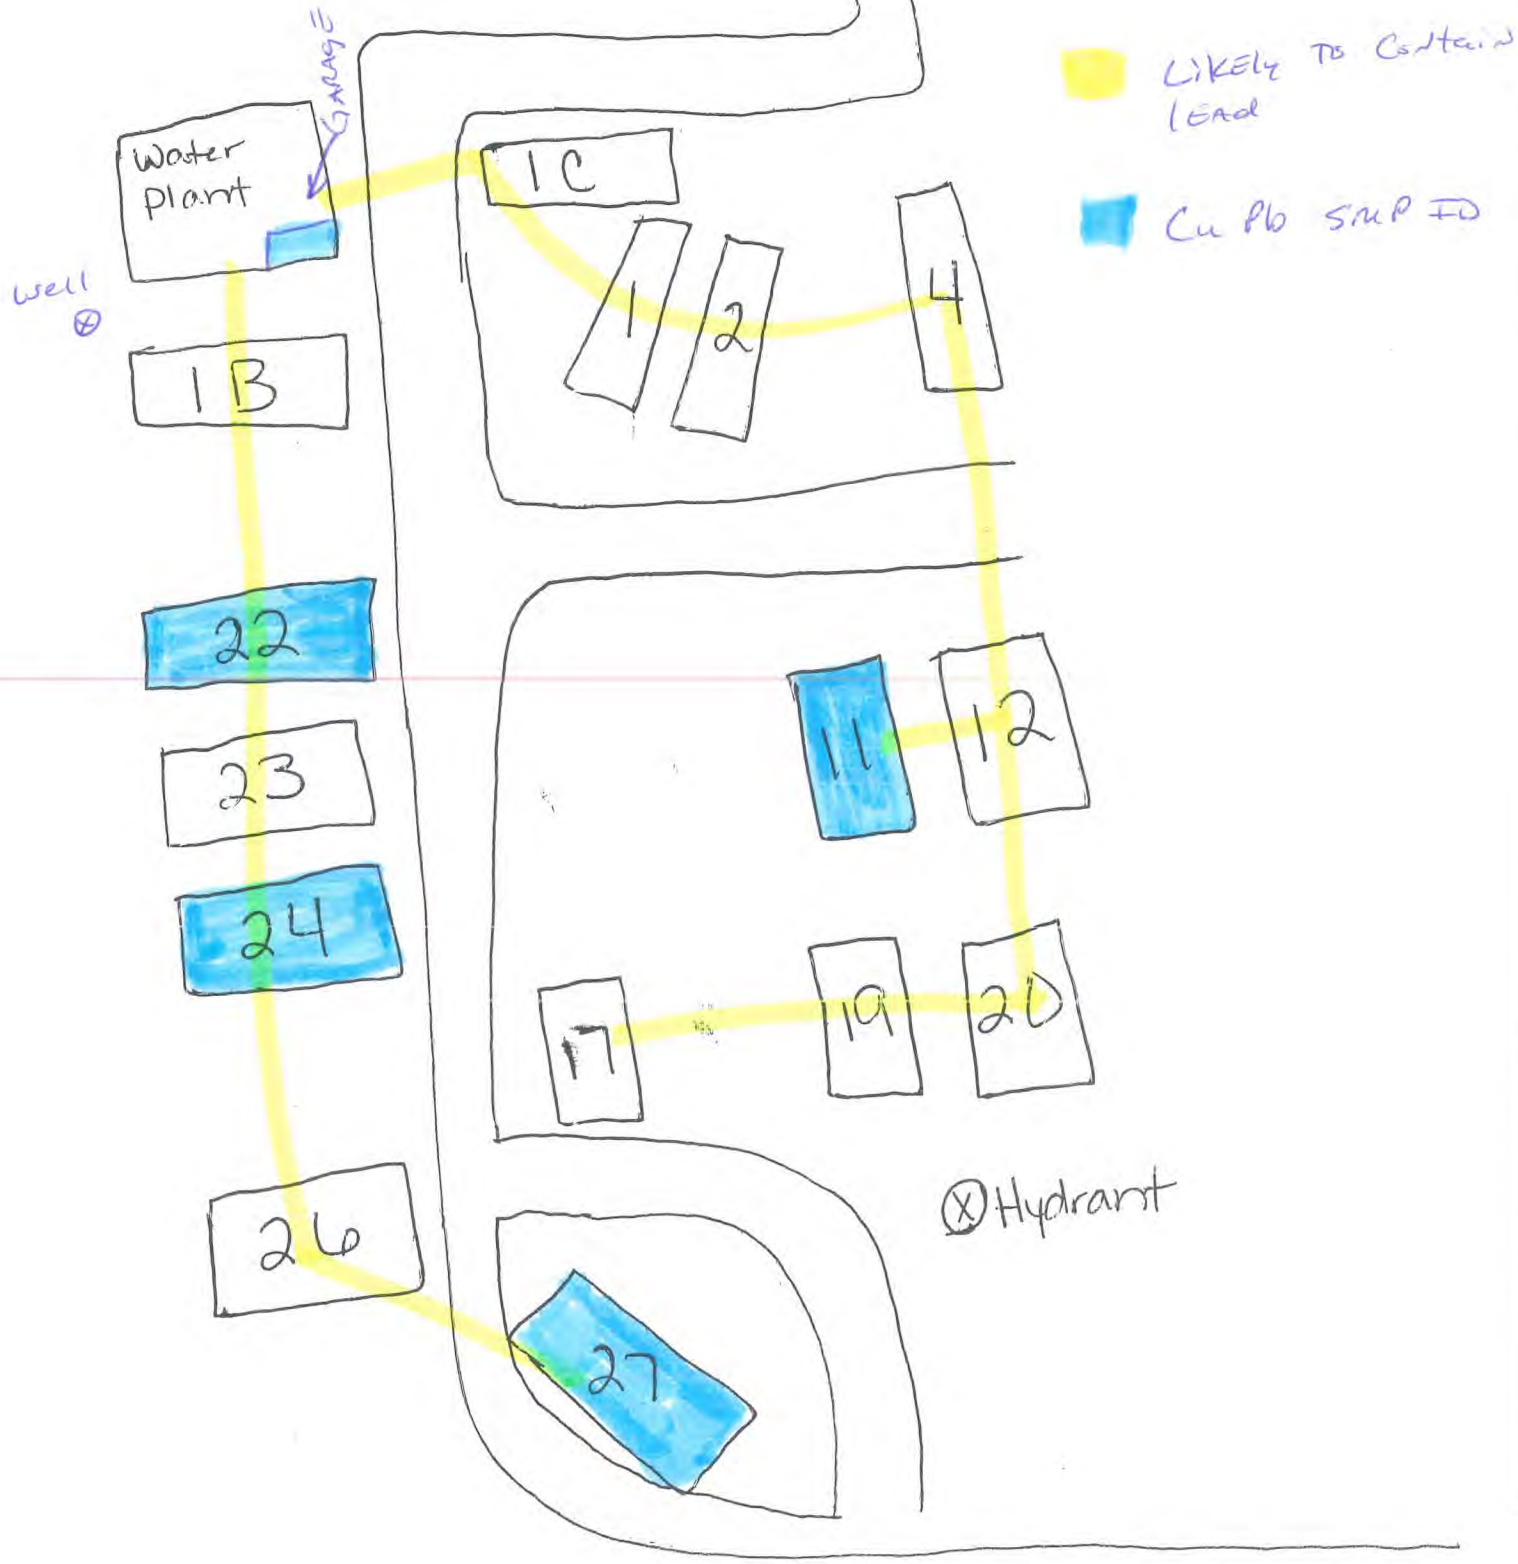

PWS OH2901812

MAPLE GROVE MHP

APPROX 1" = 50'

MAPLE GROVE MHP
1900 SPANGLER ROAD
FAIRBORN OHIO 45324
PWSID OH2901812

Maple Grove MHP has both a public and private water system on its property. The PWS serves 15 mobile homes. The water system pertains to (1) well, (3) bladder tanks and a chlorine disinfection holding tank. The water lines entering the water building are copper then they have been transitioned to PVC. The lines leaving the water building are PVC transitioned to copper then to galvanized to the mobile homes. We inspected each home and found a combination of polyethylene, or galvanized pipe coming into the homes.

Buildings in Ohio built prior to 1998 or that use plumbing material or solder manufactured before 1998 may have materials with greater than 8% lead and are at a higher risk of contributing lead to the drinking water than materials manufactured after 1998. In addition, buildings built and plumbing materials manufactured after 2014 were required to have less than 0.25% lead by weight and have the lowest risk for contributing lead to the drinking water. It should be noted however that, although prohibited, some use of leaded solder or leaded components may have occurred after the prohibitions became effective.