

RE: New Knoxville Village
Report
Lead Mapping
Drinking Water Program
Auglaize County
PWS ID: OH0601012

RECEIVED

(FAX)

P.002/002

APR 20 2017

OHIO E.P.A.
N.W.D.O.

VILLAGE OF NEW KNOXVILLE



*Kinship Village to
Ladbergen, Germany*

101 South Main Street
PO Box 246
New Knoxville, Ohio 45871-0246
Phone: 419-753-2160
Fax: 419-753-2119
www.newknoxville.com

Buildings in Ohio built prior to 1998 or that use plumbing material or solder manufactured before 1998 may have materials with greater than 8% lead and are at a higher risk of contributing lead to the drinking water than materials manufactured after 1998. In addition, buildings built and plumbing materials manufactured after 2014 were required to have less than 0.25% lead by weight and have the lowest risk for contributing lead to the drinking water. It should be noted however that, although prohibited, some use of leaded solder or leaded components may have occurred after the prohibitions became effective.

Keith Leffel Mayor mayor@newknoxville.com	Rex Katterheinrich, P.E. Administrator admin@newknoxville.com	Abigail Homan Fiscal Officer fiscal.officer@newknoxville.com	Diana Dyrness Utility Clerk utilityclerk@newknoxville.com	 American Municipal Utilities Your Community Utility Partner
Doug Cain Superintendent of Electric & Public Works electric@newknoxville.com	Shane Puckett Superintendent of Water Treatment & Distribution wtp@newknoxville.com			



Kinship Village to
Ladbergen, Germany

VILLAGE OF NEW KNOXVILLE

101 South Main Street
PO Box 246
New Knoxville, Ohio 45871-0246
Phone: 419-753-2160
Fax: 419-753-2119
www.newknoxville.com

March 6, 2017

Ms. Jill Schieffer
Northwest Ohio E.P.A.
347 N. Dunbridge Rd.
Bowling Green, OH 43402

RECEIVED

MAR 08 2017

OHIO E.P.A.
N.W.D.O.

Dear Ms. Schieffer:

Subject: Mapping of New Knoxville for Lead Identification
PWS ID# OH-0601012

In compliance with HB 512, I am enclosing a map/aerial photograph which shows the Village of New Knoxville, OH and highlights the two specific subdivisions in which we would not expect to find lead soldered joints in the copper water lines inside the houses. These two subdivisions were developed after 1998 so our anticipation is that any solder used in these homes would comply with the lead limits set by EPA to reduce the risk of lead poisoning. You will note these two subdivisions are highlighted in red. The northern subdivision is Westphalia Subdivision and the western subdivision is named Westhaven Subdivision

Homes in the rest of the village would generally be expected to have copper water lines that have lead-soldered joints and could be at risk of having higher lead content in the water. We have no exact records of exactly what type of water lines are serving each individual home in the village. I have discussed this issue with a local plumbing contractor who has a working knowledge of many of the homes in our community. They indicated that most if not all of the homes in the village would be suspect for having soldered joint copper lines with lead limits that might exceed the Ohio E.P.A. limitation.

We are also enclosing a list of our sampling monitor points (SMP) within our village for your file.

We would like to confirm for your record that our water distribution system serving the community has no soldered joints in the mains or individual water service laterals. Our water mains are PVC (poly-vinyl chloride) plastic (SDR 18) and though our original water-service laterals are copper, they are all "compression fit" couplings and joints so no solder was used and thus no lead issues. Our water distribution system was designed and installed in the early 1990's.

Keith Leffel
Mayor
mayor@newknoxville.com
Shane Puckett
Superintendent of Water
Treatment and Distribution
wtp@newknoxville.com

Rex A. Katterheinrich, P.E.
Administrator
adr:in@newknoxville.com
Doug Cain
Superintendent of Electric
and Public Works
electric@newknoxville.com

Abigail A. Homan
Fiscal Officer
fiscal.officer@newknoxville.com

Diana Dyrness
Utility Clerk
utilityclerk@newknoxville.com



Village of New Knoxville


March 6, 2017
Ms. Jill Schieffer
Page 2.

We hope this meets your needs for identifying the potential homes within our community that may have lead soldered joints in the copper water services. We will certainly continue our lead testing program in the future in order to identify specific problems that may exist in our municipality.

Should you have questions or comments in this regard or need additional information, feel free to contact me at: 419-753-4504.

Thank you.


Sincerely,



Rex A. Katterheinrich, F.E.
Village Administrator

Cc: Ohio Department of Health
Department of Jobs and Family Service

Parcel Data

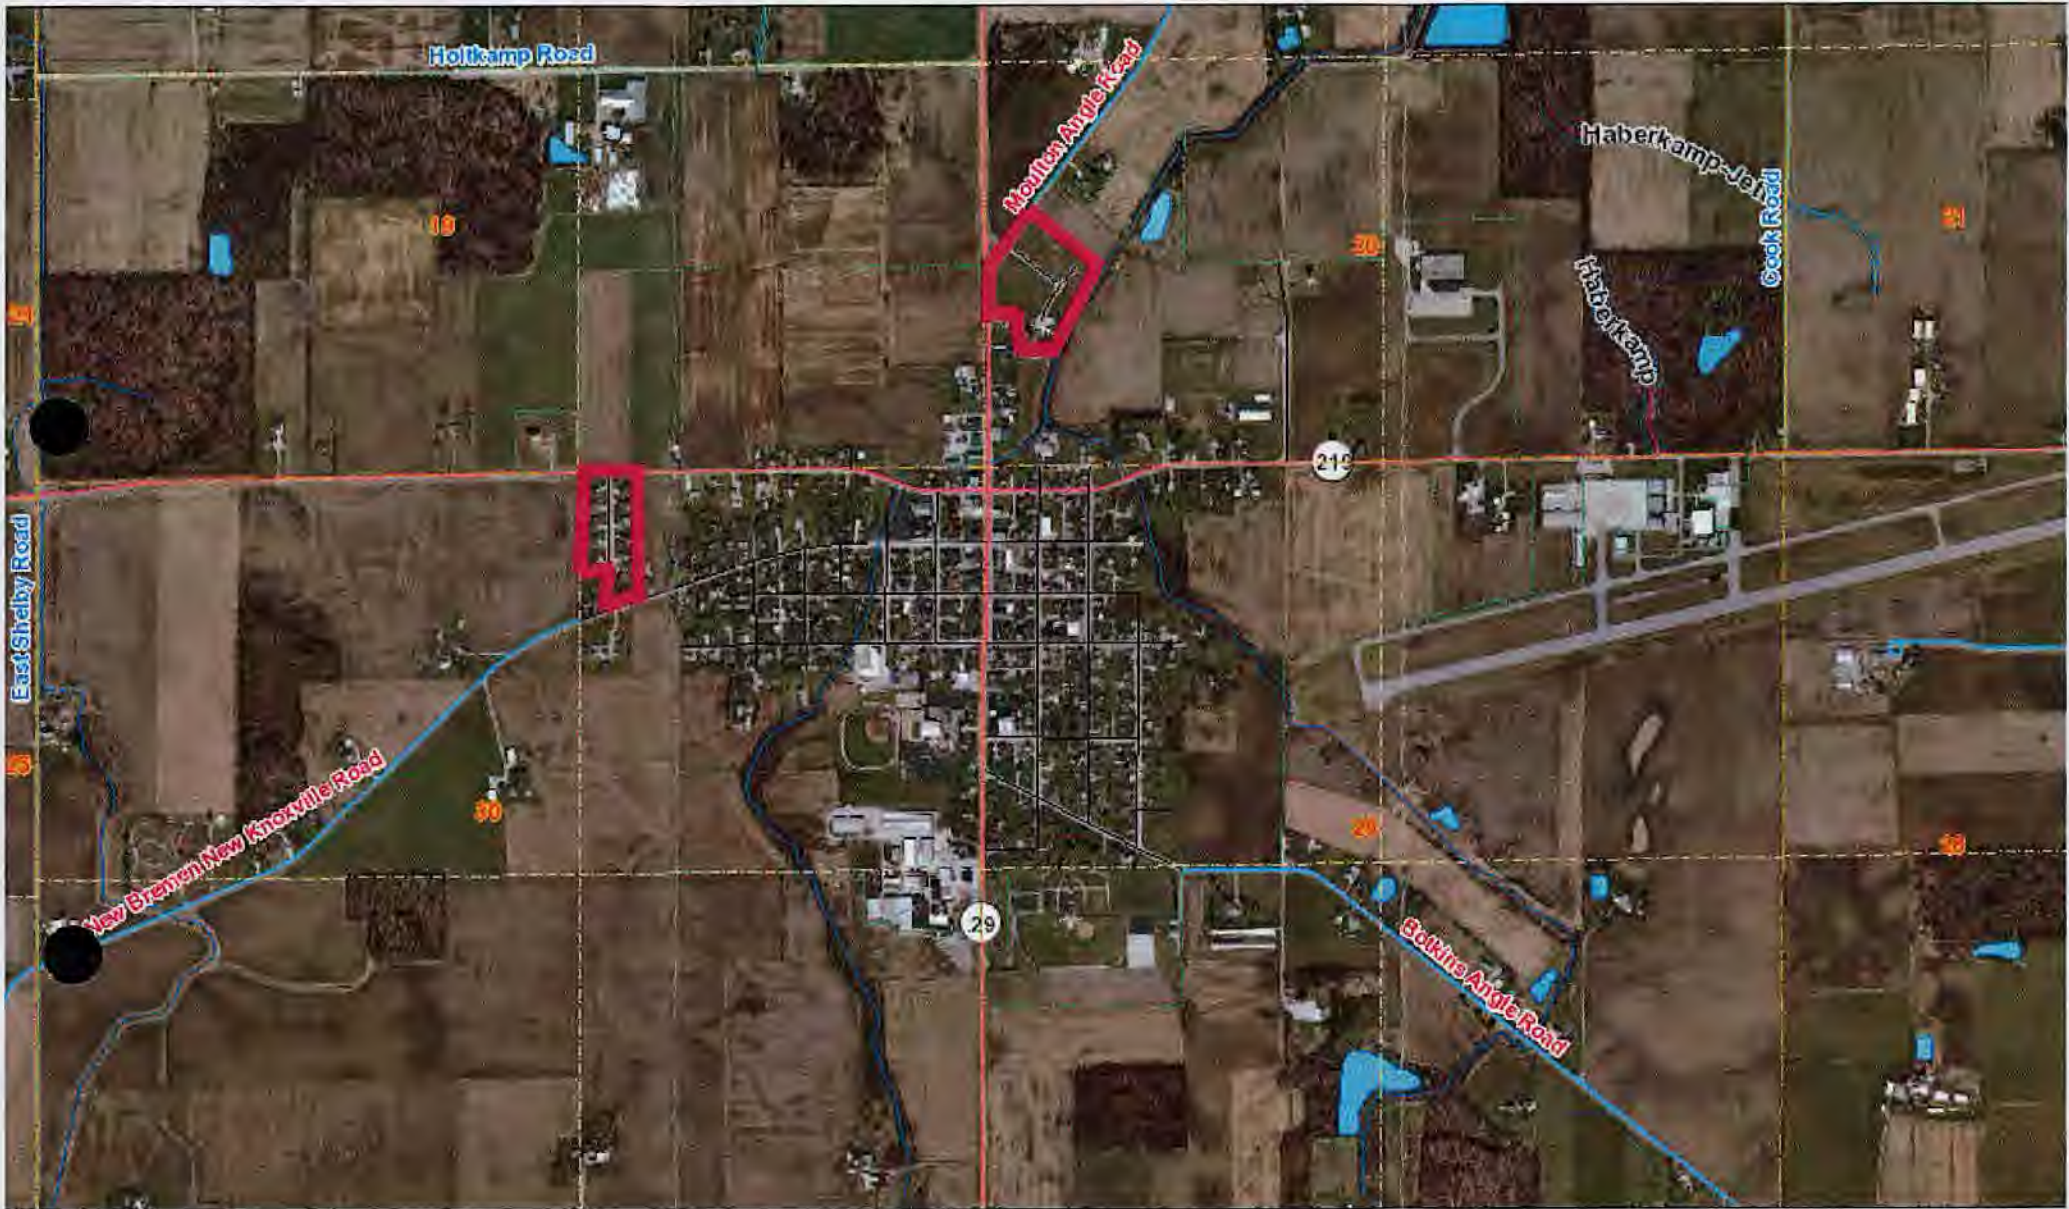

March 6, 2017
 PARCEL ID
 OWNER
 ADDRESS
 LEGAL
 SECTION_
 TOWN
 RANGE


■ Developed after 1998

VOL
 SURVEY
 MAIL_OWNER
 PADDR1
 PADDR2
 PADDR3

PAGE
RECEIVED
 MAR 08 2017
 OHIO E.P.A.
 N.W.D.O.



Tax Map/GIS Mapping
 Auglaize County
 209 S. Blackhoof Street
 Wapakoneta, Ohio 45895

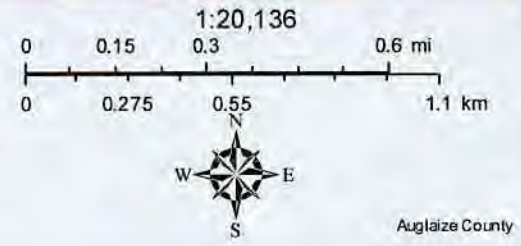

Auglaize County